

bel canto

 e.One™ series

C5i



USER'S GUIDE

C5iTM

**Integrated Amplifier / Audio DAC
with Master Reference Ultra-ClockTM**

TABLE OF CONTENTS

Safety Information	2
Certifications/Standards	3
Warranty	4
Unpacking	4
Power Connection	4
Setup and Placement	5
Design Features	5
Control Functions and Display	6
Conditioning	6
Remote Control	7
Rear Panel Connections	8
Tips for Operation	9
Specifications	10

Copyright © 2011 Bel Canto Design Ltd.
Bel Canto Design Limited
221 North 1st Street
Minneapolis, MN 55401
United States

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of Bel Canto Design. The content of this manual is provided for information use only, is subject to change without notice, and should not be construed as a commitment by Bel Canto Design Limited. Bel Canto Design Limited assumes no responsibility or liability for any errors or inaccuracies that may appear in this manual. Trademarks used in this publication: Bel Canto and the Bel Canto logo are registered trademarks of Bel Canto Design Limited. C5i and Master Reference Ultra-Clock are trademarks of Bel Canto Design Limited. Bel Canto Design Limited disclaims any proprietary interest in trademarks and trade names other than its own. Printed in the United States.

Important Safety Instructions

Explanation of symbols used in this manual or on the rear/underside of the apparatus:



The Lightning Flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product enclosure that may be of sufficient magnitude to constitute a risk of shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

- Read, keep and follow these instructions.
- Heed all warnings.
- Do not use the apparatus near water, ie near a bathtub, kitchen sink, laundry tub, in a wet basement, near a swimming pool etc.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the Manufacturer's instructions. Site the apparatus so that its location or position does not interfere with its proper ventilation. For example, the apparatus should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings, or placed in a built in installation such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
- Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus that produce heat.
- Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet; consult an electrician for replacement of the obsolete outlet.

TO COMPLETELY DISCONNECT THIS APPARATUS FROM THE AC MAINS, DISCONNECT THE POWER SUPPLY CORD PLUG FROM THE AC RECEPTACLE.

THE MAINS PLUG OF THE POWER SUPPLY CORD SHALL REMAIN READILY ACCESSIBLE.

Disconnect supply cord before changing fuse. Refer servicing to qualified service personnel.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPARATUS TO RAIN OR MOISTURE AND OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, SHOULD NOT BE PLACED ON THIS APPARATUS.

- Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and at the point where they exit from the apparatus.
- Unplug this apparatus during lightning storms or when unused for long periods of time.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug has been damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Mains plug: Use the mains plug to disconnect the apparatus from the mains supply. The mains plug must be accessible at all times. Use the mains switch (if applicable) when the apparatus is not in use.
- Objects and liquid entry: Do not let objects or liquids fall into the apparatus. Do not expose the apparatus to dripping or splashing. Do not place a vessel containing liquid on top of the apparatus.
- No naked flame sources, such as lighted candles, should be placed on the apparatus.
- The apparatus has been designed for use in moderate and tropical climates

In The U.K.

Fuse replacement:

This appliance is fitted with a non-rewireable 10 amp mains plug. The plug contains a 10 amp fuse. If the fuse has blown it can be replaced as follows:

- Pull out the black fuse cover/carrier.
- Remove and dispose of the blown fuse.
- Fit a new 10 amp BS1362 approved fuse into the carrier and push the carrier back into the plug.

Always ensure the fuse cover is fitted. If the fuse cover is missing do not use the plug. Contact your Bel Canto retailer to obtain a replacement fuse cover. Fuses are for fire protection and do not protect against electric shock.



WARNING: THIS APPLIANCE MUST BE GROUNDED.

CE DECLARATION

Bel Canto Design Ltd. declare that this product is in conformance with the Low Voltage Directive 73/23/EEC and Electromagnetic Compatibility 89/336/EEC as amended by 92/31/EEC and 93/68/EEC.

The conformity of the designated product with the provisions of Directive number 73/23/EEC (LVD) is proved by full compliance with the following standards:

EN60065 2002 General requirements

The conformity of the designated product with the provisions of Directive number 89/336/EEC (EMC) is proved by full compliance with the following standards:

EN55013 2001 Conducted emissions
EN55013 2001 Absorbed emissions
EN55020 2002 Immunity

The conformity of the designated product with the provisions of Directive number 2005/32/EC ecodesign requirements is proved by full compliance with the 'off mode' setting power of 0.0 Watts.

FCC NOTICE

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Green By Design

All Bel Canto products make use of compact and efficient design principles. Our products use less resources per unit to produce better performance than ever before. Everything from reduced packaging volume, to less weight in transport helps to reduce the overall environmental impact of bringing our products into the market.

Our products make very efficient use of electricity. Low energy usage and compact size ensure that the physical and environmental footprints of all Bel Canto products are minimized. Quality and performance play into this approach as all of our products are designed to remain vital and valid performers for many years. Should you want to upgrade to one of our new products, we even offer trade-in value for your old Bel Canto product to ensure that it is recycled in the most efficient and responsible manner.

RoHS and WEEE

All of our current products are designed and produced to RoHS standards, ensuring that dangerous materials do not enter the waste stream. Lead free electronics assemblies and environmentally safe finishing and production methods are utilized to ensure that our products and processes are environmentally safe.

Bel Canto Recycles

Bel Canto has always been a forward thinking company. In the same way that we are focused on the development of high-end audio products, we are also conscious of what we leave behind. For many years we have implemented environmentally sound measures to make the most efficient use of resources and keep our impact at a minimum.

We reuse or recycle more than 99% of the packing materials for our incoming parts shipments. Each year we divert massive amounts of cardboard, paper, plastic film, and Styrofoam from landfills. Our plastic and Styrofoam is delivered directly to local facilities that process it on site for use in their manufacturing. Steel, aluminum, and other metal waste products are delivered to local metal scrap yards for recycling back into the production stream.

We also participate in Waste Management's e-Cycling program. All electronic waste is processed in the US, with hazardous material being separated from non-hazardous, at ISO 9001 and ISO 14001 certified regional processing centers.

Our commitment to responsible production processes ensures that the absolute minimum of material used in the making of our products enters the waste stream.

Warranty Information

Bel Canto products are automatically covered by a 90 day factory warranty that covers all internal parts and labor. Register online (http://www.belcantodesign.com/Belcanto_Warranty.html) within 30 days of purchase from an authorized dealer to automatically extend your warranty for 2 years starting from the date of purchase. If you do not have web access, please contact your dealer for assistance. Upon fully completing registration, within 5 business days you will receive an email that officially validates your warranty. Your information will be used for internal use only and will not be sold or released outside Bel Canto. Your comments and suggestions are appreciated and help us continually improve our products and services.

The warranty is only valid to the original owner and is non-transferable. Damage caused by unauthorized modification, abuse, or neglect of product will void your warranty. Any cost associated with return of product is the sole responsibility of the owner. All returns require a return authorization number issued after completing the RMA form in the support section of our website. If you have any questions, please feel free to contact us online at info@belcantodesign.com.

Unpacking Your C5i

C5i packaging contains the following:

- 1 (one) – C5i
- 1 (one) – C5i User's Guide
- 1 (one) – Power Cord
- 1 (one) – Remote Control

Carefully unpack each piece and check for shipping damage. If there is any damage, or if anything is missing, please contact your dealer, distributor or Bel Canto Design.

IMPORTANT: Save all packing materials as they are specially designed to protect the unit during transportation or shipping. If the packing becomes lost or damaged, please contact your dealer, distributor or Bel Canto before attempting to transport your unit.

Power Connection

The power supply on the C5i is preset for the proper power voltage. The power cable should have the correct plug for your local power system. If you believe this to not be true, please contact your dealer immediately.

This product, like any electrical component, can be dangerous and cause injury unless correct handling procedures are observed and used. Before powering this product, it is necessary to read and follow proper setup and procedures.



WARNING!

Do not connect power to this product yet!

Setup & Placement

Because the C5i runs cool, it can be placed in many system locations without compromise. We do not recommend placing weights or other objects directly on the C5i.

This may scratch or mar the chassis finish. Do not use harsh chemicals when cleaning the outside of your C5i.



IMPORTANT!

Make all connections before powering your unit!

Design Features

Digital Inputs:

- 2-SPDIF 24/192
- 2-TOSLINK 24/192
- USB 24/96

Outputs:

- Line Level Out
- Loudspeaker Outputs
- 1/4" Front Headphone Jack

Analog Inputs:

- MM Phono
- Line Level 2.5Vrms Max

The C5i brings remarkable clarity and power to a compact and versatile platform. With 5 digital inputs, including a high resolution USB input, MM Phono and a Line level input the C5i is a complete core for a high performance entertainment system. Just add a Mac Mini or other computer, a turntable and pair of high quality loudspeakers and you have a complete entertainment system.

All digital inputs are processed through our low jitter Master Reference Ultra-Clock circuitry to ensure the best sound quality from all possible sources. The analog section is equally over specified with a 300 mA buffer to drive the lowest impedance headphones or the internal analog switching amplifier. The amplifier retains the high dynamic range as the line level section. A zero loss 24 bit digital level control completes the package to ensure that no information is lost, retaining full clarity and dynamic impact.

The C5i uses 3rd generation switching amplifiers for lower high frequency distortion, increased clarity and better high frequency extension. The C5i delivers 120 watts into 4 ohm loads per channel or 60W @ 8 ohms per channel.

Single Knob Control Functions & Display

Upon Power Up:

When switched on, the C5i will display its software revision. The SP1 input will be selected and Soft Mute will be active. The volume will be set to 50.0.

Front Panel Control Knob:

The control knob is a continuously rotating control with a push-switch function. Always push the button with your finger in the direct center of the knob. Pushing the knob will switch between selectable values on the display. Rotating the control left or right will adjust the selected value.

Volume Control:

The C5i allows you to change volume level by rotating the knob. The volume down function (counter-clockwise rotation) is very rapid and allows quick changes in the volume level. Volume up (clockwise rotation) functions rapidly up to a displayed volume level of 65.0. It then continues slowly to a maximum of 100.0.

Input Selection Mode:

Pressing the control knob in briefly will toggle into the input selection mode. The selected input will be displayed for 5 seconds. During this time you can rotate the control knob to scroll to the desired input. Pressing the knob again will select the indicated input. The volume level will automatically ramp down and up during this selection process. If the control knob is not pressed for 3 seconds, the indicated input will automatically be selected and the C5i will return to the default volume control mode. Inputs are indicated as: SP1 (SPDIF1), SP2 (SPDIF2), OP1 (TOSLINK), OP2 (TOSLINK), USB, LIn (Line In) and PH (Phono).

Front Panel Digital Lock Indicator:

When no digital input signal is present on a selected input, the first decimal point on the display will blink on and off. For example the display will show: .65.0 and the first decimal point will be slowly blinking. If this occurs, check that the correct input is selected and then check that the digital source is connected, active and functioning correctly. Once a digital signal is present, the first decimal point will remain constantly lit.

CONDITIONING

The sonic performance of the C5i will begin to stabilize after 100 hours of continuous power up.

Remote Control

The C5i Remote Control has a comprehensive set of control features that are not available on the front panel.

To access all C5i control features press the button marked PRE on the remote control. The Main CD controls will still operate in the DAC, PRE and Tuner modes.

Display: Toggles through several display options:

1. Normal mode with Level Displayed
2. Input Sample Rate Displayed for several seconds, example 44.1 or 96 or LOS indicating Loss of Signal or no digital input detected.
3. Display Off: Turns off the display. Display comes on for several seconds whenever a status change is detected

Mute: When in variable output mode this will switch the analog output mode from Soft to Hard Mute to Un-muted. Soft mute is indicated by two decimal points in the far right of the display. Hard mute is indicated by 3 decimals on the display. The Mute function will punch through to any Bel Canto unit set in Variable Output mode.

VOL+: Increases the volume setting in Variable Output mode. This will punch through to any Bel Canto unit in Variable Output mode. The display will show the volume level while changing.

VOL-: Decreases the volume setting in Variable Output mode. This will punch through to any Bel Canto unit in Variable Output mode. The display will show the volume level while changing.

CH/SCAN+: This will toggle the input selection up in number and wrap around to the lowest number. Note that the first press of this control will show the active input selection.


CH/SCAN-: This will toggle the input selection down in number and wrap around to the highest number. Note that the first press of this control will show the active input selection.

Number Buttons: Use for direct input selection.

1: SPDIF1 2: SPDIF2 3: TOSLINK1 4: TOSLINK2
5: USB 6: Line In 7: Phono



Rear Panel Connections

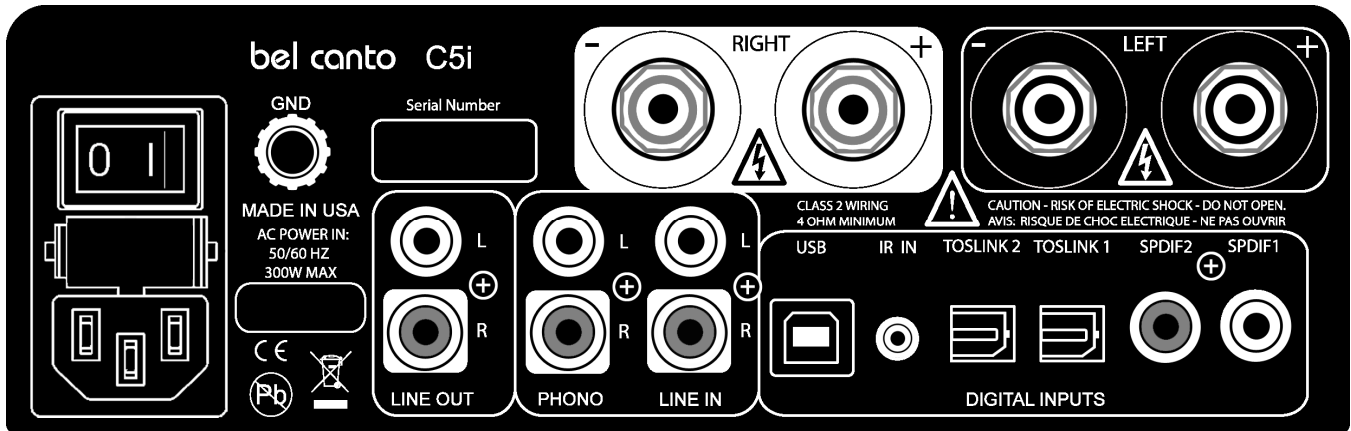

Never Connect Either the Positive or Negative Speaker Output to Any Ground Contact! Use Class 2 Wiring for all Loudspeaker Connections!

Beginning in the upper left:

- **ON/OFF switch** applies power when the switch is in the 1 position.
- **Fuse Drawer** with 5 amp/250V slow blow 5mm x 20mm fuse.
- **IEC power cord jack:** Connect the supplied or a quality aftermarket power cord from this jack. Note the power setting indicated on the back of the unit before connecting the power.
- **GND:** Ground wire attachment for turntable
- **Line Out:** is a volume controlled line output that can be used to drive a second amplifier or powered subwoofer.
- **Line In:** is for signals up to 2.5Vrms.
- **Phono:** Preamp input raises turntable signal to line level
- **USB:** Digital input can be connected to a computer for playback of any audio format up to a 24/96 data rate. The system will automatically recognize the C5i as an audio converter enumerated as *Bel Canto USB 2496* when using Windows 98 or later and any version of Macintosh OSX.
- **IR In:** Connect an IR extension emitter to increase range of the remote
- **TOSLINK 2** and **TOSLINK 1:** Digital inputs accept any standard plastic or glass fiber optical TOSLINK cable and operate to 24/192 data rate
- **SPDIF2** and **SPDIF1:** Digital inputs accept RCA connections from any 75 ohm SPDIF source and operate up to and including a 24/192 data rate
- **R +/- and L +/-:** Loudspeaker binding post connectors

When all connections to and from the unit have been made then double check everything before plugging the C5i into the power source. After turning on, the C5i will go through its display check and show the software revision number. The unit will be in Soft Mute with the SP1 input selected. The volume will be set to 65.0.

Tips For Operation

Using Headphones

When headphones are inserted into the headphone jack, the volume can be adjusted via the control knob or remote. The input can be selected as normal from the front panel or remote. The Loudspeaker and Line Outputs of the C5i are disabled when headphones are connected.

Power Up

We recommend leaving the C5i powered at all times as the sonic quality is best after several hundred hours of play and 48-72 hours of power on after the initial break-in time.

Connection to a Computer

The USB port can be used for up to 24/96 data, enough for any CD source. For connection at 24/192 or higher data rates, we recommend using a quality sound card with SPDIF or glass TOSLINK connection. For more details on optimizing computer audio sources please refer to our on-line guide at: www.belcantodesign.com

What to do if there is hum or ground noise

The design of the C5i greatly reduces the chance for ground loop induced hum and noise. Connect all power cables of the audio system to a common outlet box or power conditioner unit. Having the audio system components share a common ground will greatly reduce the possibility for ground current noise being introduced into the audio signal path.

Volume Control Punch Through

The Volume Up, Down and Mute functions on the remote control will affect any Bel Canto unit in Variable Output mode regardless of whether PRE, DAC, CD or TUNER is selected. It is recommended that only the device with volume control closest to the power amps be in Variable Output mode. Any other devices that are capable of volume control should be in Fixed Volume mode.

Specifications

Power Output 1% THD:	120W @ 4 ohms, 60W @ 8 ohms per channel
Minimum Load:	3 ohms per channel
Peak Output Current:	30 amperes
Frequency Response:	+/-3 dB 1.5Hz-90kHz, 4 ohm load
THD+N:	0.003% 1W, 1kHz, 4 ohms
IMD (CCIF):	0.0003%, 1W, 14:15kHz, 4 ohms
Output noise:	<50uVRMS A-weighted 10Hz-20kHz
Damping factor:	>200
Output Impedance at 100Hz:	<20 milliohms
Dynamic Range:	115 dB
Input connections:	5-Digital Inputs, MM Phono and Line Level Analog
Line In impedance:	11 k ohms
Phono In Impedance:	47 k ohms/150pF
Phono Accuracy:	+/- 0.25dB, 50Hz-15KHz
Output connections:	2 sets of Binding Posts, RCA Line Out, Headphone Output
Line Out Impedance:	100 ohms
Power On usage:	14W
Power Off usage:	0.0W
Power Input:	100-120VAC, 230-240VAC 50/60 Hz
Size:	8.5 x 3.5 x 12[inches], 216 x 88 x 305[mm] (WxHxD)
Weight:	13lbs, 6.5Kg

Features and specifications are subject to improvements and changes without prior notice.

Bel Canto Design, LTD
221 First Street North, Suite 300
Minneapolis, MN 55401
Phone : 612.317.4550 Fax : 612.359.9358
www.belcantodesign.com
info@belcantodesign.com
©2011 Bel Canto Design, LTD
e.One™ is a trademark of Bel Canto Design, LTD

version 1.0

